

Remote Mounting



FEATURES

- 2 isolate, 1 equalize & 2 vent valves (plugged vent provided)


APPLICATIONS

- Isolation & venting of gauges, switches & transmitters
- High pressure line shut off
- Liquid & gas services

STANDARD PARAMETERS

Mounting	Remote
Wetted parts	AISI 316 SS
Instrument connection	½" NPT (F) x 2 Nos
Stem packing	PTFE
Process connection	½" NPT (F) x 2 Nos
Stem	Conical metal tip
Max. working pressure	400 bar (6000 psi)
Max. working temperature	240°C
"T" bar handle	AISI 316 SS
Drain port	¼" NPT (F) x 2 Nos, plugged
Weight	~2765 g

DIMENSIONAL DRAWING

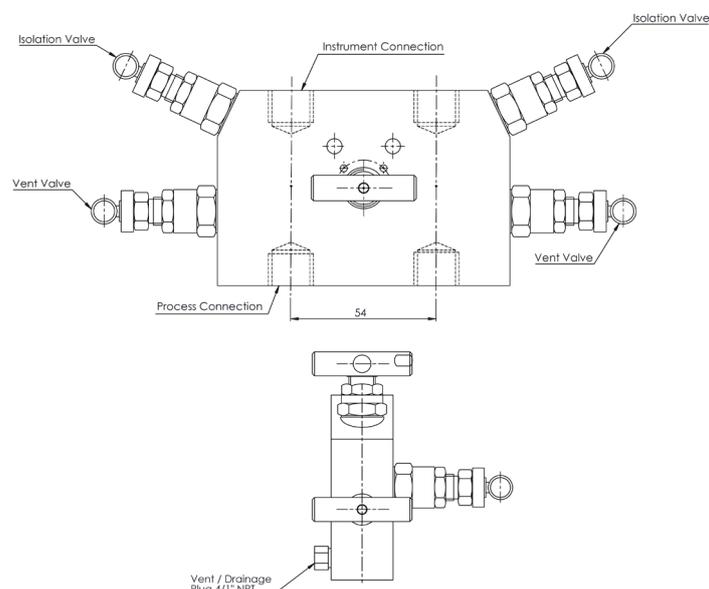

All dimensions are in mm.

01 / 02

ORDERING CODES

1. MOUNTING		RE	5. PROCESS CONNECTION				04N
DR	Direct		11N	1/8" NPT (M)	12N	1/4" NPT (M)	
RE	Remote		13N	3/8" NPT (M)	14N	1/2" NPT (M)	
			11B	1/8" BSP (M)	12B	1/4" BSP (M)	
			13B	3/8" BSP (M)	14B	1/2" BSP (M)	
			01N	1/8" NPT (F)	02N	1/4" NPT (F)	
			03N	3/8" NPT (F)	04N	1/2" NPT (F)	
			01B	1/8" BSP (F)	02B	1/4" BSP (F)	
			03B	3/8" BSP (F)	04B	1/2" BSP (F)	
2. WETTED PARTS		MF	6. OTHER OPTIONS				XL
MB	Carbon Steel /ASTMA105		TN	NACE standards			
MC	AISI 304 SS		TO	Use for Oxygen service			
MF	AISI 316 SS		TH	Hydro test certificate			
MG	AISI 316L SS		TC	Material test certificate			
MM	Monel		XL	Marking by laser			
MO	Hastelloy C-276						
3. INSTRUMENT CONNECTION		04N					
11N	1/8" NPT (M)	12N	1/4" NPT (M)				
13N	3/8" NPT (M)	14N	1/2" NPT (M)				
11B	1/8" BSP (M)	12B	1/4" BSP (M)				
13B	3/8" BSP (M)	14B	1/2" BSP (M)				
01N	1/8" NPT (F)	02N	1/4" NPT (F)				
03N	3/8" NPT (F)	04N	1/2" NPT (F)				
01B	1/8" BSP (F)	02B	1/4" BSP (F)				
03B	3/8" BSP (F)	04B	1/2" BSP (F)				
4. STEM PACKING		ME					
ME	PTFE						
MA	Grafoil						

Ordering Example:
MT-M510MV-RE-MF-04N-ME-04N-XL

NOTE
 Other connections are available, please contact factory for details.