



FEATURES

- Converter protection class IP67, transducer protection class IP68.
- Wide measurement range, pipe size from DN15 to DN6000.

APPLICATIONS

- Three types installation method: Wall mounted, DIN-rail mounted explosion-proof box mounted.
- Connect the temperature transducer can finish the heat/energy measurement.

STANDARD PARAMETERS

Principle	Transit -time ultrasonic flowmete
Accuracy	±1% Reading
Display	2 x 20 character LCD with backlight
Signal output	1 way 4~20mA output, electric resistance 0~1K, accuracy 0.1%
	1 way OCT pulse output (Pulse width ~1000ms, default is 200ms)
	1 way relay output
Signal Input	3 way 4~20mA input, accuracy 0.1%, acquisition signal such as temperature, press and liquid level
	Connect the temperature transducer Pt100, can finish the heat/energy measurement
Data Interface	Insulate RS485 serial interface, upgrade the flowmeter software by computer, support the MODBUS

SPECIAL CABLE

Twisted-pair cable, generally, the length under 50 meters; select the RS485, transmission distance can over 1000m.

PIPE INSTALLATION CONDITION

Pipe material	Steel, Stainless steel, Cast iron, Copper, Cement pipe, PVC, Aluminum, Glass steel product, liner is allowed
Pipe diameter	25...6000mm
Straight pipe	Transducer installation should be satisfied: upstream 10D, downstream 5D, 30D from the pump

MEASURING MEDIUM

Type of liquid	Single liquid can transmit sound wave, such as: Water (hot water, chilled water, city water, sea water, waste water, etc.) Sewage with small particle content Oil (crude oil, lubricating oil, diesel oil, fuel oil, etc.) Chemicals (alcohol, etc.); Plant effluent Beverage: Ultra-pure liquids, etc.
Temperature	-30...160°C
Turbidity	No more than 10000 ppm and less bubble
Flowrate	0...±7 m/s

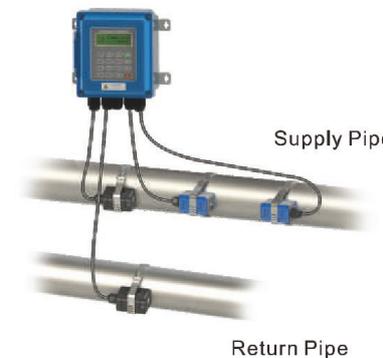
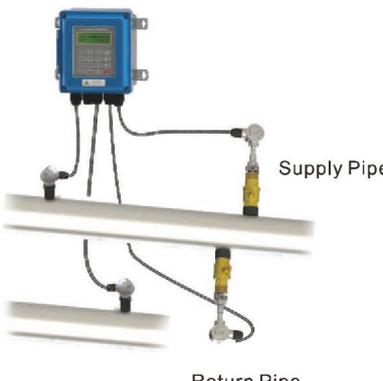
WORKING ENVIRONMENT

Temperature	Convertor: -20...60°C; Flow Transducer: -30...160°C
Humidity	Convertor: 85% RH; Flow Transducer: can measure under water, water depth ≤ 2m (transducer sealed glue)

SPECIFICATIONS

Power supply	DC8-36V or AC85-264V (optional)
Power consumption	1.5W
Dimension	132 x 150 x 85 mm (convertor)

MEASURING DIAGRAM

	Flow Measurement	Heat Measurement	Features
Clamp on			<ul style="list-style-type: none"> • No need to cut off water, no pressure loss. • Connect clamp on temperature transducer, can finish the heat/ energy measurement. • Easy for installation.
Insertion			<ul style="list-style-type: none"> • No need to cut off water, no pressure loss. • Stable and reliable for long term operation. • Connect Pt100 temperature transducer, can finish the heat/energy measurement.
Pipe			<ul style="list-style-type: none"> • Need to cut off pipe. • With high accuracy and stability. • Connect Pt100 temperature transducer, can finish the heat/energy measurement.

OPTIONAL TRANSDUCERS

Please choose the suitable transducer, according to different liquid pipe condition and installation method, (please refer to the measuring diagram).

Types	Picture	Spec.	Model	Measurement Range	Temperature	Dimension	
Clamp on		Small size	TS-2	DN25~DN100	-30...90°C	45 x 25 x 32mm	
		Medium size	TM-1	DN50~DN700	-30...90°C	64 x 39 x 44mm	
		Large size	TL-1	DN300~DN6000	-30...90°C	97 x 54 x 53mm	
High temp clamp on		Small size	TS-2-HT	DN25~DN100	-30...160°C	45 x 25 x 32mm	
		Medium size	TM-1-HT	DN50~DN700	-30...160°C	64 x 39 x 44mm	
		Large size	TL-1-HT	DN300~DN6000	-30...160°C	97 x 54 x 53mm	
Insertion		Standard	TC-1	DN80~DN6000	-30...160°C	190 x 80 x 55mm	
		Lengthen	TC-2	DN80~DN6000	-30...160°C	335 x 80 x 55mm	
Pipe		π type	G1	DN15~DN32	-30...160°C	SUS304 thread connection	please refer to detailed pipe dimensions
		Standard	G2	DN40~DN1000	-30...160°C	Carbon steel thread connection	

OPTIONAL TEMPERATURE TRANSDUCERS

Connect the temperature transducer can finish the heat/energy measurement.

Picture	Specification	Model	Meas. Range	Temperature	Cut of water	Accuracy
	Clamp on temperature transducer Pt100	CT-1	>DN50	-40...160°C	No	100°C ± 0.8°C
	Insertion-temperature transducer Pt100	TCT-1	>DN50	-40...160°C	Yes	
	Insertion Pt100 Installation with pressure	PCT-1	>DN50	-40...160°C	No	
	Insertion Pt100 small size pipe diameter	SCT-1	<DN50	-40...160°C	Yes	